



## 日成汽车插鞘式扎线带 PTCV

### 日成汽车插鞘式扎线带 PTCV

材 质：进口尼龙66(NYLON66)，防火等级94V-2，不易老化。


使用方法：先将机板挖孔，扎线带插入孔内，再将电线束紧即可。

扎带 尼龙扎带




### 产品规格


TCV-156B

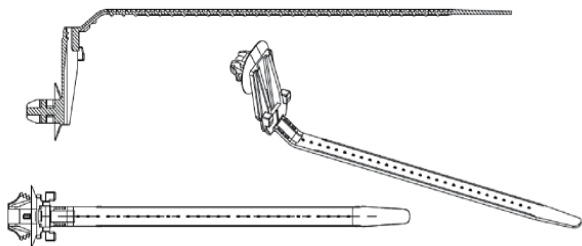


PTCV-170B

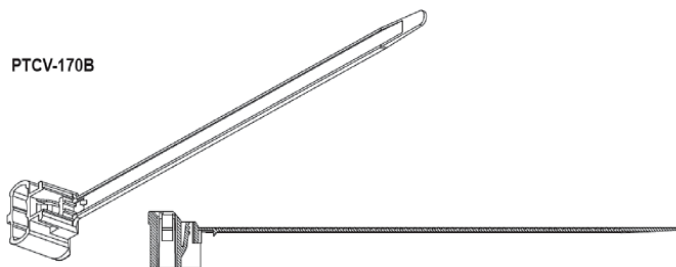

PTCV-180B

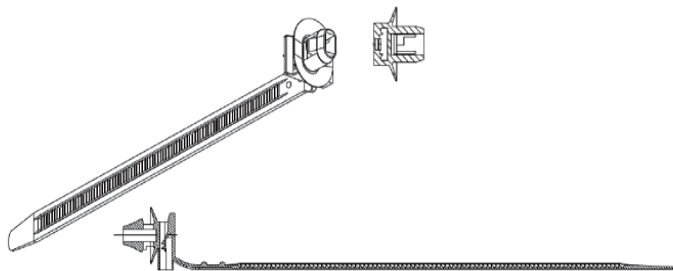

PTCV-182B

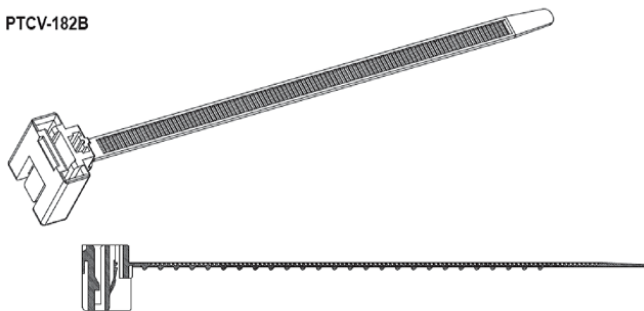

型号 Item No .	长度 Length	宽度 Wide	最大 束线径	孔径	板厚	承受力	包装
本色	mm	mm	mm	mm	mm	kgs	
PTCV-156B	156	7.0	35	7.0	2.5-5	40	100
PTCV-181B	181	8.8	45	10	3-4	40	100
PTCV-170B	170	5.0	40	5	-	18	100
PTCV-182B	182	6.0	45	6	-	40	100

### 图片介绍

**RCCN**<sup>®</sup>



**RCCN**<sup>®</sup>



**RCCN**<sup>®</sup>



